

MD-1222P-L2

Heavy Duty Industrial Purpose
 Parking-lot Management System Purpose
 Dual Channel Loop Inductive Detector
 Pack-Unit™

[RS485 출력, 주차면 검지용]

FEATURES

General Features

- Industrial purpose dual channel inductive loop vehicle detector.
- Algorithm optimized for parking vehicle detect purpose.
- Heavy duty high reliable surge protection scheme.
- Single DC power operation
- 1U Shelf / Chassis direct mountable
- 8HP-3U or 6U EURO Card mountable
- Flame retardant case (난연성 외함 적용)

Special Features

- Static mode operation
- Line surge protection with TVSS
- 2KV isolated DAA
- ±15kV (IEC1000) ESD protected DTE interface
- DC Power input surge protection(TVSS)
- Automatic environment factor compensation algorithm
- Easy configuration setting with dip switch
- Simple cascade type line connectivity
- 주요 용도 : 주차면 점유 상태 검지 용도


SPECIFICATIONS

Operating Mode

- Presence mode operation
 - : Slow scan presence mode vehicle detect operation.

Detect Algorithm Feature

- Parking vehicle detect purpose optimized
- Active environment compensation algorithm

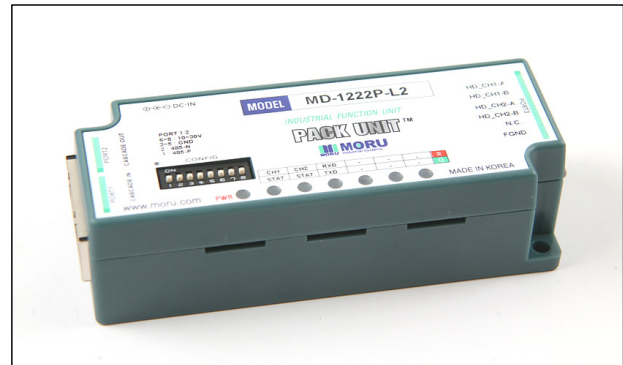

System Interface

- RS485/2W/Half duplex/Multi-drop communication

Power

- Single DC Source : +12~30V DC
 - @12V DC : 120mA (typ.) consumption (per unit)
 - @24V DC : 65mA (typ.) consumption (per unit)
- Optional AC-adapter(power pack) for AC source available.

Physical Dimensions

- 122W x 46D x 36H (mm)

Weight

- 0.12 kg (typ.)

Environmental

- Temperature : -34°C to +74°C (Operating)
- : -40°C to +80°C (Storage)
- Relative humidity : up to 95% (non-condensing)

Detect Core characteristics

- Sensitivity Setting : Typical / High
- Loop Inductance : 30-2000uH
- Detect Delay : 3 sec.(max.)
- Real Time Loop Head Status Monitoring : Open Monitoring
- Line Isolation : 2.0KV

THUNDER BORN FIELD RELIABILITY [MD-1222P-L2] (Rev.M071901)

DESCRIPTION

PACK-UNIT™ Series

PACK-UNIT™ 시리즈는 DCS, SCADA, ITS, TCS, CTC, General TMTTC등 산업용 제어 시스템 운용 현장에서, BASE SOLUTION의 성능 및 신뢰성 향상을 위하여 다년간 노력하고 경험한 [MORU Industrial Systems]의 창의적 기술과 Know-How를 집약하여 된, 새로운 개념의 Industrial base solution Unit입니다.

특히 낙뢰, Surge, 열악한 온/습도 환경, AC 누설 전류 등으로 인한 수많은 Trouble, 그리고 기구적 거치 공간 및 거치 방법의 문제 등을 해결하기 위하여, 기존의 설계 관행 일체를 탈피하고, **다만 산업용 시스템의 현장상황에 근거한 Concept을 새로이 정립하여 설계한 [산업용 base solution Unit] 시리즈입니다.**

INTERFACE PIN CONFIG.

PORT1(cascade in) pin config. (8P-Modular)

	NAME	DESCRIPTION
1	485-P	RS485+
2	485-N	RS485-
3	GND	GROUND
4	GND	
5	GND	
6	HVCC	DC IN (12~30V)
7	HVCC	
8	HVCC	

* PIN 1 : LOWER SIDE , PIN 8 : UPPER SIDE

PORT2(cascade out) pin config. (8P-Modular)

	NAME	DESCRIPTION
1	485-P	RS485+
2	485-N	RS485-
3	GND	GROUND
4	GND	
5	GND	
6	HVCC	DC IN (12~30V)
7	HVCC	
8	HVCC	

* PIN 1 : LOWER SIDE , PIN 8 : UPPER SIDE

* CASCADE IN/OUT PORTS ARE SWAPPABLE (FULLY EQUAL)

DC-IN Jack config. (2P DC JACK)

	NAME	DESCRIPTION
1	12~30V	OUTSIDE
2	GND	CENTER PIN

PORT3 (loop head interface) pin config. (6P-non screw Terminal Block)

	NAME	DESCRIPTION
1	HD_CH1 A	LOOP HEAD CH1 - A
2	HD_CH1 B	LOOP HEAD CH1 - B
3	HD_CH2 A	LOOP HEAD CH2 - A
4	HD_CH2 B	LOOP HEAD CH2 - B
5	N.C.	-
6	FGND	FRAME GROUND

* PIN 1 : UPPER SIDE , PIN 6 : LOWER SIDE

* LOOP HEAD CONNECTION PIN [A - B] CAN BE SWAPPABLE (NO POLARITY)

DIP Switch config. (8Pt.(upper)+8Pt.(lower))

	NAME	DESCRIPTION
1	ID4(MSB)	LOCAL ID 00000B ~ 11111B MAX 32 LOCAL ID (ON:1 , OFF:0)
2	ID3	
3	ID2	
4	ID1	
5	ID0(LSB)	
6	DEBUG	OFF : NORMAL , ON : DEBUG MODE
7	SENS	OFF: TYPICAL , ON : HIGH
8	RESET	OFF: NORMAL , ON : RESET

* PIN 1 : LEFT SIDE, PIN 8 : RIGHT SIDE

LED display function (4EA ; dual color LED)

	NAME		DESCRIPTION
1	PWR	R	HVCC INPUT STATUS
		G	INTERNAL +5V STATUS
2	CH1 STAT	R	CH1 VEHICLE STATUS
		G	CH1 LOOP HEAD STATUS
3	CH2 STAT	R	CH2 VEHICLE STATUS
		G	CH2 LOOP HEAD STATUS
4	COMM	R	RXD STATUS
		G	TXD STATUS

**Industrial Communication Leader
모루시스템(MORU Industrial Systems)**

경기도 군포시 당정동 522 SK벤티움 101동 402호
T) 031-436-1510 F) 031-436-1511
HOME PAGE : WWW.MORU.COM
EMAIL : morusys@moru.com

* 성능 향상을 위하여, 예고 없이 제품 사양이 변경될 수 있습니다.